

Intelligent Wall Mount Strobe WST

Overview

Wall mount strobe is a high quality loop powered device designed to alert building occupants of an emergency. It utilizes the B501AP base for improved installation flexibility. When triggered by the fire panel its intense strobe gives a highly visible warning. A choice of lens colours makes the device suitable for a wide variety of applications.



Description

Faster installation

- Large cable access
- Rear or surface cable entry
- Loop continuity spring

Reduced full life costs

- High quality robust materials for longer life
- UV stable materials
- Robust construction for added impact resistance

Flexible installation

- Low current draw enables more devices on loop
- Adjustable volume control (on device or from panel)
- Deep and high IP base options
- Red or Pure White body colours

Reduced inventory count

- Common base with detectors (B501AP)
- Device protocol is backward compatible through inclusion of both SS CLIP and Advanced Protocols
- 32 tone selection to cover many markets (on device or from panel)

Reduced install errors and easy fault finding

- Positive "poke yoke" engagement
- Address tag for clear indication
- Anti-tamper feature
- In-built isolation options
- Simple familiar rotary wheel address controls

Excellent system performance

- High efficiency piezo disk and horn profile generate excellent sound output
- Advanced protocol enables controllable sound output, tone selection and group polling


Intelligent Wall Mount Strobe WST

Electrical Specification

Supply Voltage:	15 to 29V DC (Non-isolation) 15 to 29V DC (Isolation)
Standby Current:	120µA (Non-Isolation) 225µA (Isolation)
Max current consumption sounder and strobe:	5.21mA (Non-Isolation) 5.4mA@15V (Isolation)
Strobe Flash Rate:	1Hz

Environmental Specification

Operating Temp:	-25°C to 70°C
Relative Humidity:	Up to 95% non-condensing
Ingress Protection:	IP21C (with low profile base) IP44 (with surface mount base) IP65 (Waterproof base)

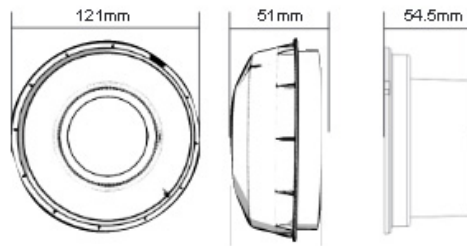

Ordering Information

Device	Code	Skirt Colour	Body or Lens colour	Isolation	Customer ID	Example
Wall mount sounder	WSO	P = pure white D = detector white (ivory)	Body: R = red P = pure white D = detector white (ivory) Lens: R = red A = amber	I = isolation N = non-iso	00 to 99	WSO-PR-I03
Wall mount strobe	WST					WST- PA-N14
Wall mount sounder strobe	WSS					WSS-PC-I02
Detector base sounder	BSO					BSO-PP-I04
Detector base strobe	BST					BST-PR-N31
Detector base sounder strobe	BSS					BSS-DA-N26

Approvals

Approved to: EN54-17 where applicable and CPD/R

Clear lens:

This product is approved to EN54-23 as an Open Class device. Coverage details are available on the installation manual.

Red and Amber lens products:

These are not approved to EN54-23 (Visual Alarm Devices) and must not be used as a visual alarm device or to provide a primary warning notification of fire.

For RoHS, WEEE & REACH information please visit www.kac.co.uk

Mechanical Specification

Colour:	Pure White
Lens Colour:	Red, Clear, Amber [#]
Weight:	168g
Terminal Size:	1.5 - 2.5mm ² max
Mounting options:	Low Profile, Surface or High IP
[#] Lens availability dependant on order volume	

ADEVA LTD. Fire Alarm Systems

Guldeste Sok. No:14 Yakacik
Kartal / Istanbul / Turkey

Tel: +90 216 5982800 Fax: +90 216 5982899
Email: info@adevafire.com www.adevafire.com

Copyright © 2009 ADEVA. All rights reserved.

All technical data is correct at time of publication and is subject to change without notice. All trademarks acknowledged. Installation information: in order to ensure full functionality, refer to the installation instructions as supplied.